

### Movement Detector with Wide Coverage (DM TEC 300)


- IR movement detector for wide areas.
- Assembly embedded in ceiling, on a surface or in a standard distribution box.
- Wide coverage. Up to max. Ø30m at 2,5m high and across movement.
- It is possible to connect a pushbutton switch that allows the charge to be controlled manually.
- Time delay, sensitivity and brightness can be adjusted by control knobs or remote control (EM MAN DM1).
- Application examples: parking, industrial buildings, sports center,...




### TECHNICAL SPECIFICATIONS

Power supply		230V~ 50/60Hz
Load	LED lamps	400W
	Incandescent lamps	2,000W
	230V Halogen lamps	1,000W
	LV Halogen lamps Electronic transfo	900W
	LV Halogen lamps Inductive transfo	600W
	Fluorescent tubes	900VA (100µF)
	CFL	400W
Breaking capacity		230V / 10A
Coverage		360° Ø30m (max.) at 2,5m high
Time		Impulse, 10sec ~ 30min
Brightness		10Lux ~ 2000Lux
Sensitivity		Adjustable
Operation temperature		-20°C ~ +45°C
Protection degree		Surface mounted: IP44

### WIRING DIAGRAM

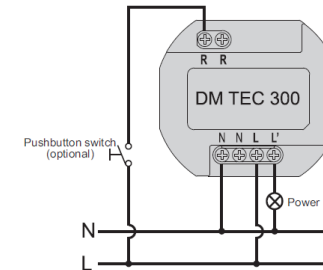

### DIMENSIONS

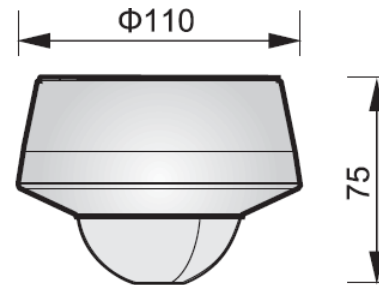

### COVERAGE

