


EMERGENCY POWER PACKS STARLITE

LED Auxiliary emergency power pack
(For Incorporate into light fitting or remote for downlight)



• UFO/NM/L103 (AUXILIARY)

• Rectangle or • Round

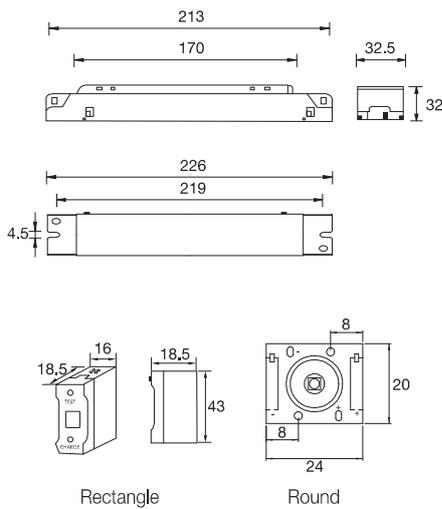

Dimension: mm NTS
High Power L.E.D

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



Type and batch tested with
PSB PLS-LISTED LABEL



TECHNICAL DATA

Mode of Operation	: Non-maintained
Lamp	: 3W High Power LED
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 1.1W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED
Test Facility	: Tactile switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Weight (Module only)	: 0.25kg (gross)
Compliance	: SS563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
UFO/NM/L103 (AUXILIARY)	3W LED	Nickel Cadmium



Specifications subject to changes without prior notice.

