


**CABLE MANAGEMENT SYSTEM**

**PVC RIGID CONDUIT**

**FITTINGS AND ACCESSORIES**


**PVC FLEXIBLE CONDUIT**



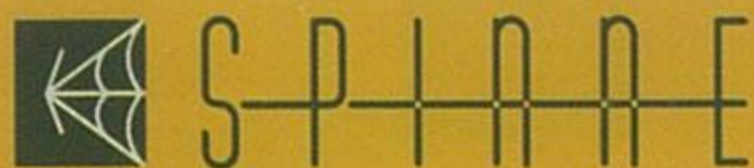

## High Impact PVC Conduit and Accessories

SPINNE uPVC Conduit - IEC 61386 -21:2004 / BS EN 50086-2-1: 1996

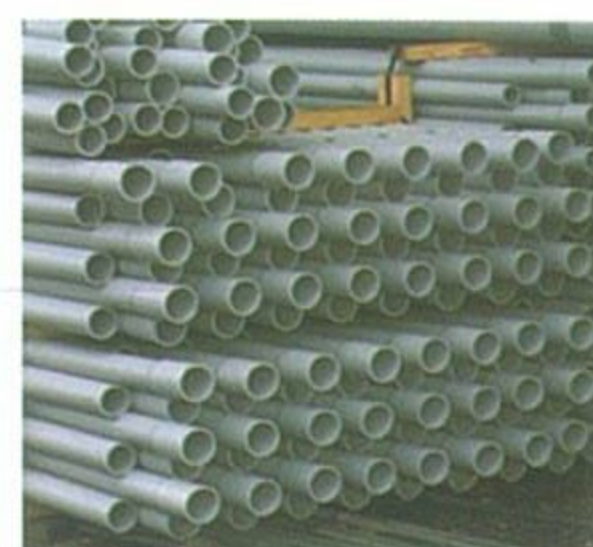


Spinne uPVC Conduit systems offers comprehensive wiring system with a wide selection of conduit, fitting and accessories that are manufactured to relevant international and British Standard.

- Medium Gauge Class 332112; Heavy Gauge Class 442112
- Length 2.9 meters
- Available in White and Black Color for Conduit and Accessories

## SPINNE uPVC Conduit Accessories

- IEC 61386-21:2004 / BS 4607 Part 5 where applicable.

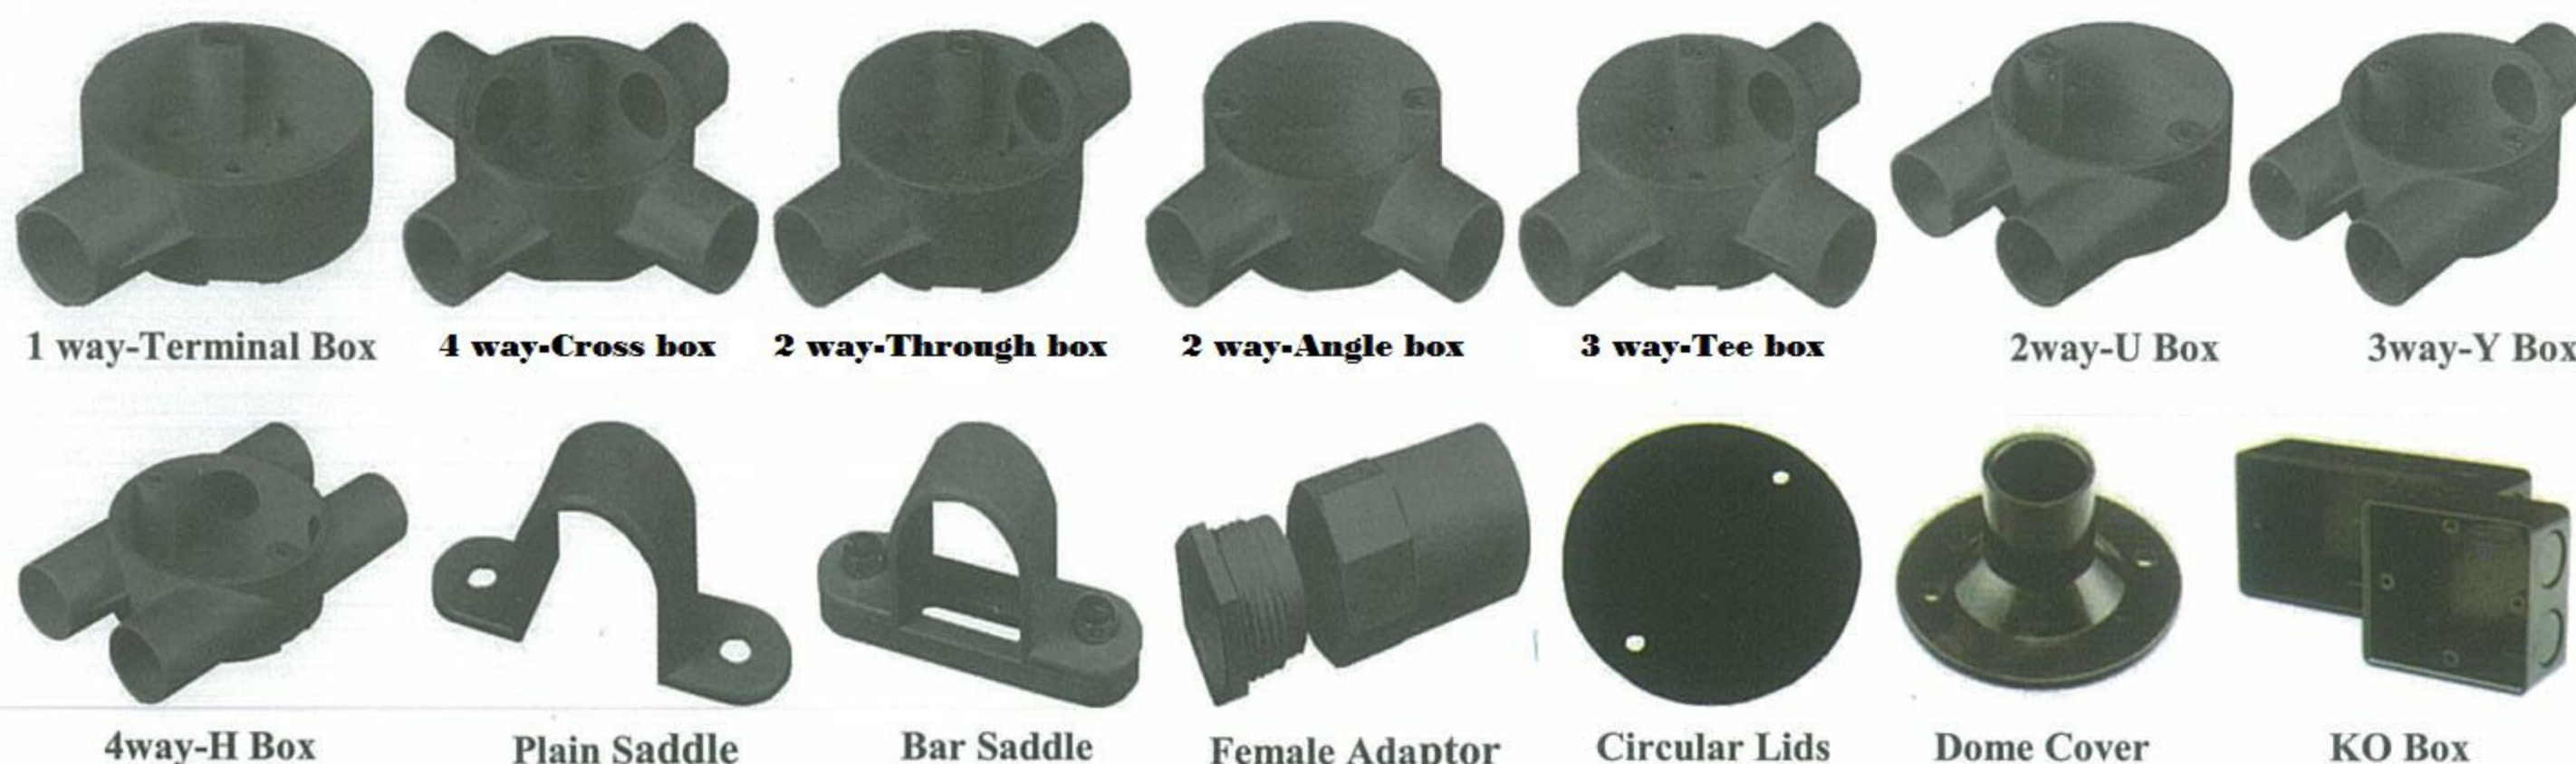

## SPINNE Corrugated Flexible PVC Conduit

Spinne corrugated flexible PVC conduits are manufactured to comply with the requirement of BS 4607 : Part 3 : 1971 using quality thermoplastic. Spinne corrugated flexible conduit are able to withstand a high working temperature range of  $-5^{\circ}\text{C}$  to  $70^{\circ}\text{C}$  with good resistance to most acids and chemical, offering maximum protection for cables with great flexibility.

CAT NO.	Diameter (mm)		Standard coil
	Outer	Inner	
CC16	16	12	50M
CC20	20	16	50M
CC25	25	20	50M
CC32	32	25	50M
CC40	40	34	50M



Available in White and Black Color